

TOTO LINK

The Smartest Network Device

www.totolink.net



CP300

300Mbps 2.4GHz
Wireless Outdoor AP/Client



300Mbps
802.11b/g/n 2.4GHz



Weatherproof
Design



WISP

11dbi
ANTENNAS

2*11dBi
Antennas

➤ Overview

300Mbps 2.4GHz Wireless Outdoor AP/Client

Model No. CP300

CP300 is WISP CPE Solution that specially designed for long distance wireless transmission. With two built-in dual polarized antennas and advanced radio architecture, it can make the radio signal transmission coverage more extensive with a stable wireless connection and deliver up to 300Mbps data rate. Powered by Passive PoE, CP300 makes the wires deployment more flexible. Besides, the outdoor protection design makes it to be excellent for working in all kinds of weather.

➤ Features

- Complies with IEEE802.11n/g/b standards on 2.4G band.
- Supports DHCP/Static IP/ PPPoE(dual access) /PPTP(dual access) / L2TP(dual access) broadband functions.
- Supports Passive PoE power supply, transmitting distance can be far as 60 meters, more flexible for cabling deployment.
- Supports Qos bandwidth control.
- Supports 64/128-bit WEP, WPA, WPA2, WPA-Mixed security.
- Two Built-in dual polarized antennas.
- 4 intelligent LED indicators intuitively show signal strength.
- RF power up to 500mw.
- WDS function connection.
- IP65 level dust-proof and water-proof, 6KV lighting-proof and 15KV ESD static electricity-proof.
- Provides AP/Client/Repeater/WISP working modes.




Selling point

➤ 5km+ Wi-Fi Transmission

Complied with the latest IEEE802.11n standards, CP300 supports to deliver wireless 2.4GHz speed up to 300Mbps. The product transmission distance is 5KM.


➤ High-gain Polarized Antennas

Built-in 12dBi high-gain polarized antennas, CP300+ performs better in the Isolation and Diversity Reception of the wireless signal, delivering wireless signal much further and intensively, thus improving the Wi-Fi experience for the users

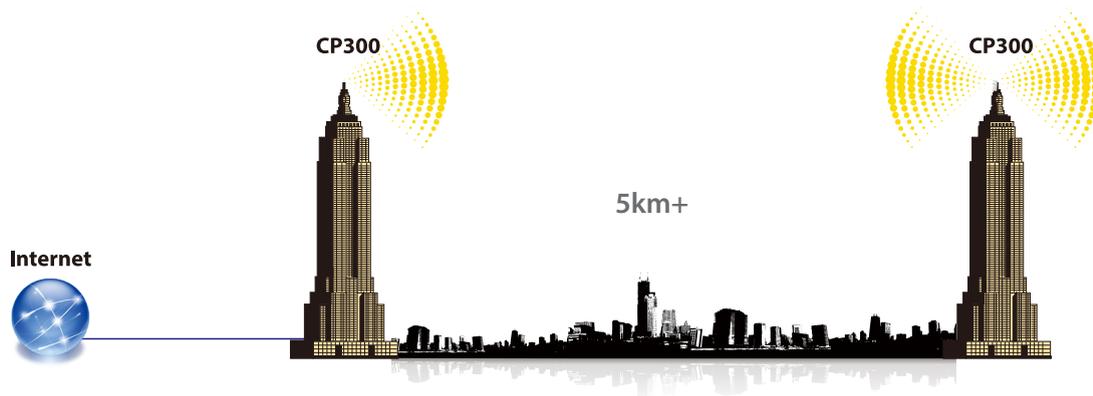


➤ Outdoor Protection Design

No matter where you place it, in high or low temperature condition, it will work very well as normal. With the outdoor protection design, it can adjust poor working environment and effectively protect itself from dust, water and lightning.

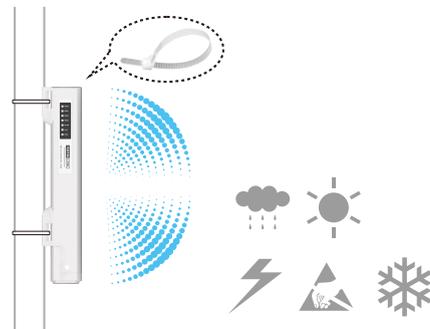

➤ Flexible Power Supply by Passive PoE


With passive PoE power supply, CP300 ensures the structured cabling security, improves the deployment flexibility, and reduces costs.

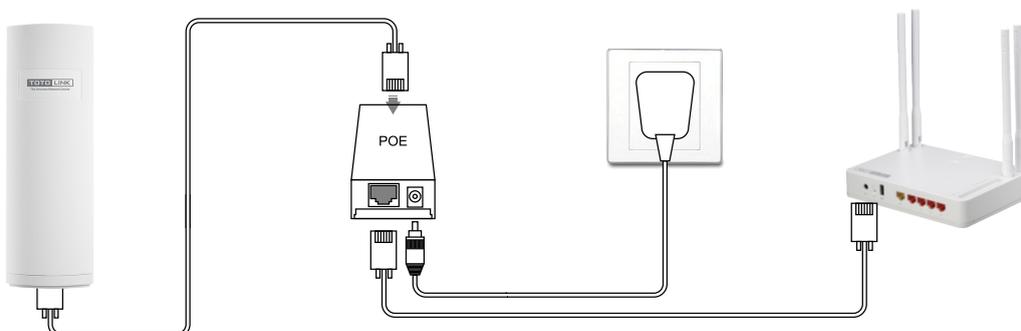

Specification

Hardware

| | |
|----------------|---|
| Interface | - 1 *100BaseTX (Auto MDI/MDIX) LAN Port (Passive PoE Supported) |
| Power Supply | - 12VDC /1A (PoE) - Voltage range: 12-24VDC |
| Button | - 1 *RESET Button |
| Antenna | - 2 *Built-in dual polarized antennas |
| LED Indicators | - 1 *Power, 1 *WAN/LAN, 1 *LAN, 4 *Signal Strength |

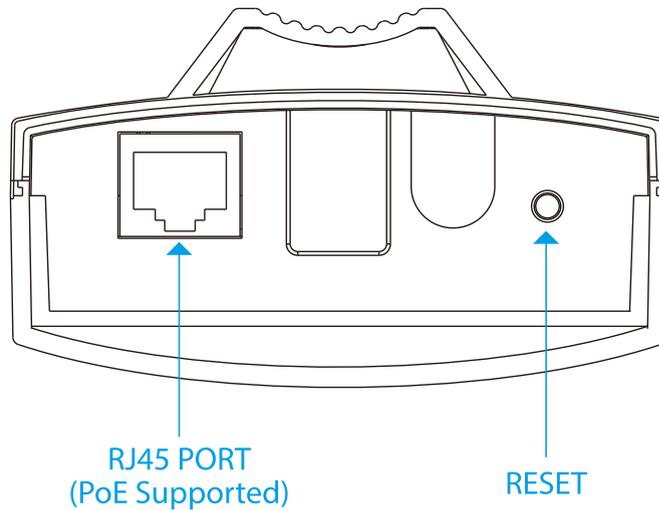

Wireless

| | |
|-----------------------|--|
| Standards | - IEEE 802.11n, IEEE 802.11g, IEEE 802.11b, IEEE 802.3u, IEEE 802.3 |
| RF Frequency | - 2.4~2.4835GHz |
| Data Rate | - Up to 300Mbps |
| EIRP | - < 27dBm |
| Wireless Security | - 64/128-bit WEP, WPA, WPA2, WPA-Mixed |
| Reception Sensitivity | - 11b 11M: -81 dBm@10% PER - 11g 54M: -68 dBm@10% PER - 11n HT20 MCS7: -65 dBm@10% PER - 11n HT40 MCS7: -62 dBm@10% PER |

Specification

Software

| | |
|----------------|---|
| Operation Mode | - AP Mode - Repeater Mode - Client Mode - WISP Mode |
| MIMO Type | - 2.4G 2Tx-2Rx |
| Network | - LAN Setting - WAN Setup (WISP Mode only) - VLAN Settings (WISP Mode only) |
| Wireless | - Basic Setting, Advanced Setting, WDS Setting, Access Control, WPS Setting, QoS |
| Firewall | - IP/Port Filtering, MAC Filtering, URL Filtering, Port Forwarding, DMZ |
| Management | - Upgrade Firmware, Save/ Reload Setting, Time Zone Setting, Password Setting, Reboot Schedule , Reboot |
| Reliability | - 6KV Lightning Protection - 15KV ESD Protection - IP65 level dustproof and waterproof |

Others

| | |
|------------------|---|
| Package Contents | - CP300 Wireless CPE *1 - Power Adapter *1 - User Guide *1 - Ethernet Cable *1 - Strips*2 |
| Environment | - Operating Temperature: -40 C ~70 C (-40 F ~158 F) - Storage Temperature: -40 C ~70 C (-40 F ~158 F) - Operating Humidity: 10%~90% non-condensing - Storage Humidity: 5%~90% non-condensing |

ZIONCOM (HK) TECHNOLOGY LIMITED

Copyright©ZIONCOM (HK) TECHNOLOGY CO., LTD. All Rights Reserved.

Headquarter & R&D Center

7/F, Unit D, 4 Building Shenzhen Software Industry Base, Xuefu Road, Nanshan District, Shenzhen, Guangdong, China

Tel : +86-755-6136-3288 (Ext.867) | FAX : +86-755-6136-3344

Factory

Building A1 & A2 Lantian Technology Park, Xinyu Road, Xinqiao Henggang Block, Shajing Street, Baoan District, Shenzhen, Guangdong, China

Direct Line : +86-755-3686-1188(Ext. 5810) | FAX : +86-755-3686-1133

CP300

300Mbps 2.4GHz Wireless Outdoor AP/Client