

TOTO LINK
The Smartest Network Device

Quick Installation Guide


Wireless N Range Extender

Model No.: EX200U

V1.0 | 1804

Copyrights © TOTOLINK. All rights reserved. Website: <http://www.totolink.net>
Information in this document is subject to change without prior notice.

1 Appearance

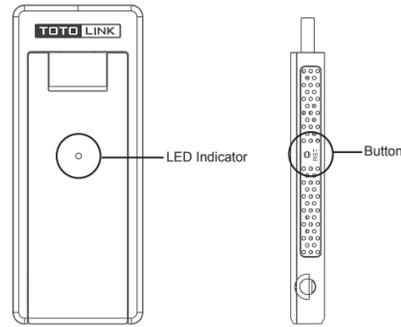

LED Status Description


Status	Description
Solid Red	The extender is starting or extending
Solid Orange	The extender finished starting or Wi-Fi extension failed
Solid Green	Wi-Fi extension is successful
Blinking Red/Orange	WPS is enabled
Blinking Orange	The RST button has been pressed for more than 5 seconds

Button


RST	Press the RST button for about 2 seconds, WPS function enabled. Press the RST button for more than 5 seconds until the LED indicator blinks orange, the device will restore to factory default settings.
-----	---

2 Quick Setup by Smart Phone


4 Extend Wi-Fi. Choose your router's 2.4GHz SSID.

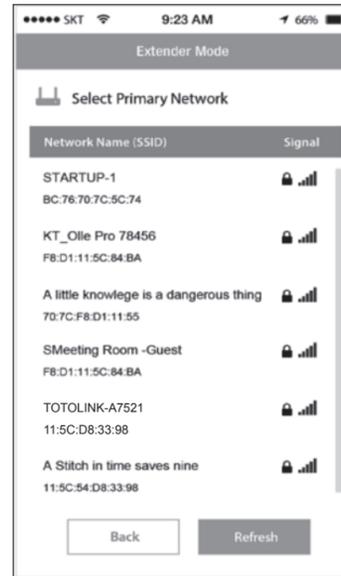

5 Configure. Enter its wireless password. Either keep the default SSID or customize it for extended 2.4GHz wireless network. Verify your settings and click **Connect**.

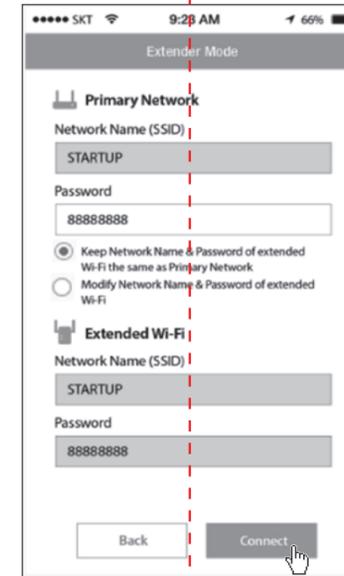

6 Verify. Check the LED status to verify whether the Wi-Fi extension is successful.

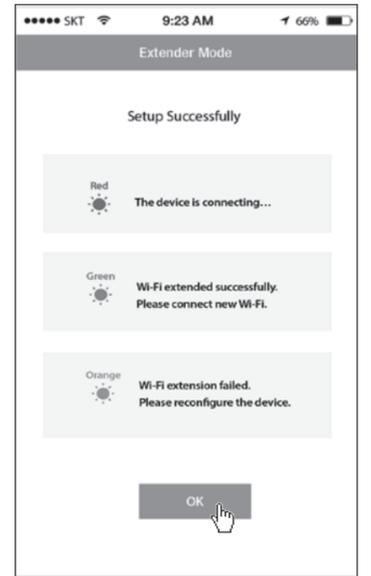


2 Quick Setup by Smart Phone

1 Power on. Plug the device into any USB port that near the router. Wait until the LED turns to solid orange.


2 Connect to the Extender. Using your smart phone to search and connect Wi-Fi TOTOLINK_EX200U. (Settings—Wi-Fi)

3 Login. The Setting page will turn up automatically. Click **Extender Mode**. If below window doesn't appear, please open a browser and enter **192.168.0.254** manually.

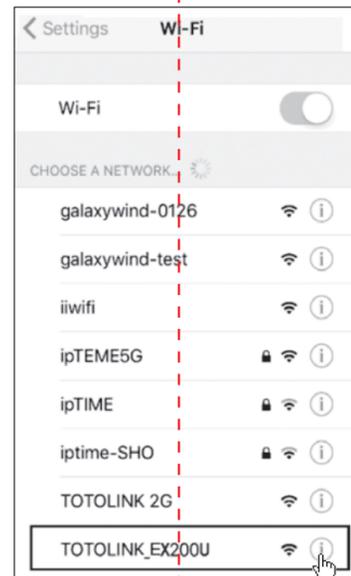


3 Relocate

1 Plug the extender into USB port that halfway between your router and the Wi-Fi dead zone. Wait about 30 seconds until the LED light turns to solid green. If not, please relocate it closer to your router to achieve better signal quality.

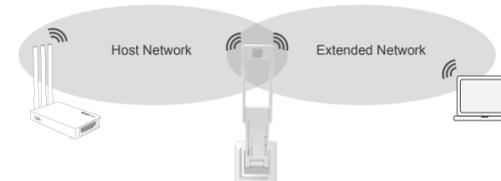

2 In order to make full use of extender, please keep the antennas of the extender perpendicular to the horizontal plane. See below:

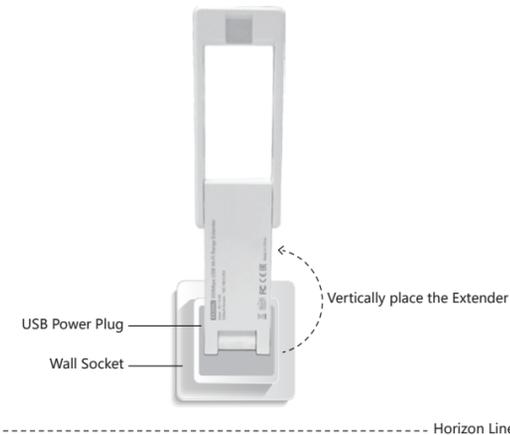

4 FAQ (Frequently Asked Questions)

1 What should I do if I cannot access the extender's web management page?

- A1: Make sure you have connected to the wireless network of the extender.
- A2: Open any browser, enter **192.168.0.254** in the address bar and press **Enter**.
- A3: Reset the extender and connect to it again.

2 How to reset the extender to factory default settings?

- Keep the extender power on, use a pin to press the RST button on the side of device. When the LED blinks orange, release the button.